

KOTELYZER[®] 150


High-power model for industrial use.

Three heat functions in one. (Soldering iron, hot blower and torch)

■ Model : 72A ■ Name : Kotelyzer 150 (lighter ignition)

Standard Parts

Part No.	Illustration	Description
72-01-07		Soldering Tip
72-02		Protective Cap
72-01-52		Hotblow Tip
72-01-52		Heat Shrink (S)

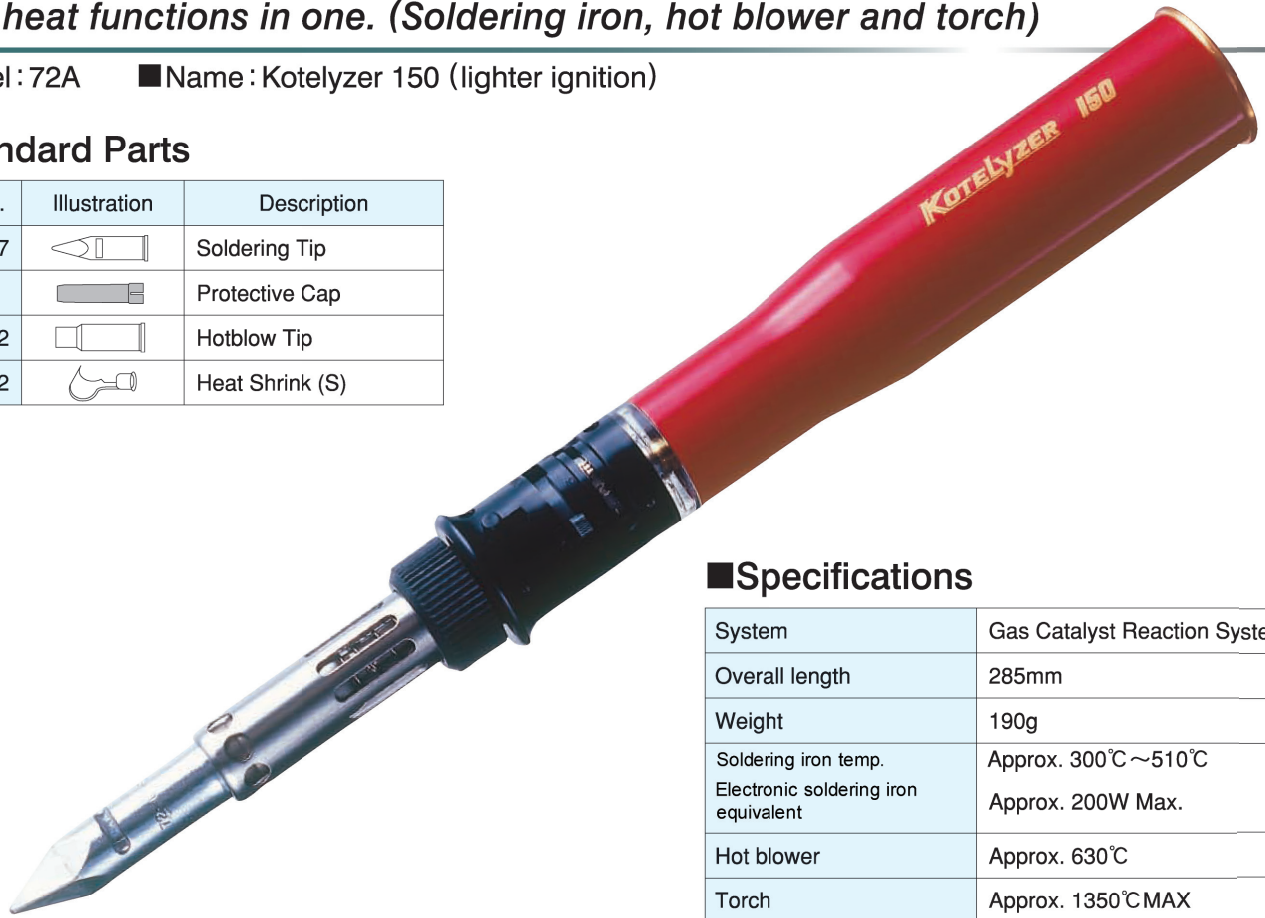


Specifications

System	Gas Catalyst Reaction System
Overall length	285mm
Weight	190g
Soldering iron temp. Electronic soldering iron equivalent	Approx. 300°C~510°C Approx. 200W Max.
Hot blower	Approx. 630°C
Torch	Approx. 1350°C MAX
Gas Container capacity	63mL
Operation time/ one gas filling	Approx. 150min.

Soldering iron function



Hot blower function

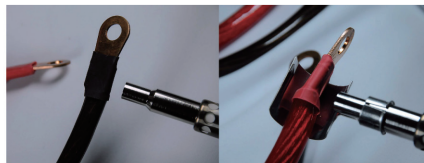

Torch function





Optional Parts

Soldering Tip (Pb free)

 ● 72-01-01 φ3 20	 ● 72-01-02 W 10 20	 ● 72-01-03 φ4 20 45°	 ● 72-01-05 φ1.5 20	 ● 72-01-06 φ 20 45°
 ● 72-01-07 φ1.5 20	 ● 72-01-11 W 7 25	 ● 72-01-12 W 4 20	 ● 72-01-13 φ12.5 20 45°	 ● 72-01-14 M5-P0.8

Hotblow Tip



Heat Shrink

- 72-01-54 (L) W=32
- 72-01-55 (S) W=27



Tip Housing

- 72-14



Carrying String

- 72-52U



Protective Cap

- 72-02



Ejector Unit for Torch

- 72-07TU



Ejector Unit

- 72-075U



Knurled Nut

- 72-14

